



PCA Hose



**PCA Hose:**

- Standard: section 15858, AS4262
- Flame retardant standard: UL94VTM-O OR EN5026, IEC60332-1
- Hypalon rubber cloth, wear-resistant, firm, flexible
- Polyurethane coating process, anti-wear, UV resistance
- YKK heavy zipper, high strength of pipeline connection
- Unique waterproof skirt design, no water accumulation
- Anti-smelling and flame-retardant design, 100% flame-retardant nylon PU coated cloth, less temperature loss
- Insulation material: aluminum foil insulation bubble film, light weight design
- Tight fabric can resist cracking and falling off during repeated operation
- Nylon buckle, good adhesion and anti-falling off
- Operation ambient temperature of air conditioning pipe is more than- 20°C- + 70°C

**SELECTION TABLE:**

Other lengths such as 10', 20', 40' or 60' Dia. 12" or 12" ~ 8" are also available

Specifications	OD	length	Zipper type	Zipper direction
14 "	350mm	3m	8#/10#	Insert left or right
14 "	350mm	6m	8#/10#	Insert left or right
14 " ~ 8 "	350mm-205mm	600mm	8#/10#	Insert left or right

**Choices of Hose Materials**




Hypalon





Oxford



PVC

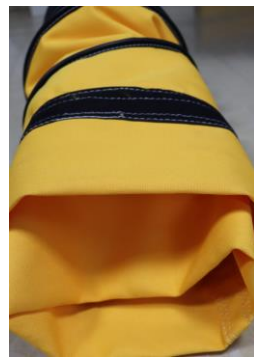

**Insulation Materials**

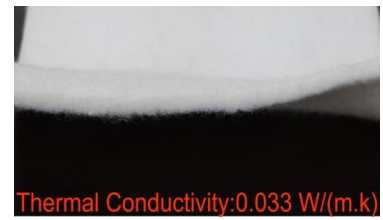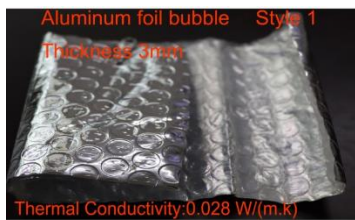

**Wire Reinforced, Wear Strip or Lay-Flat without Wear Strip**



**Zippers 8# or 10# and Velcro Straps**

